


01903 538488 sales@pestfix.co.uk www.pestfix.co.uk

## **Technical Specifications**

## SKU: NF345 / NF344 / NF329 / NF343 / NF348 Product Name: Unistrut 41mm x 41mm Slotted Channel

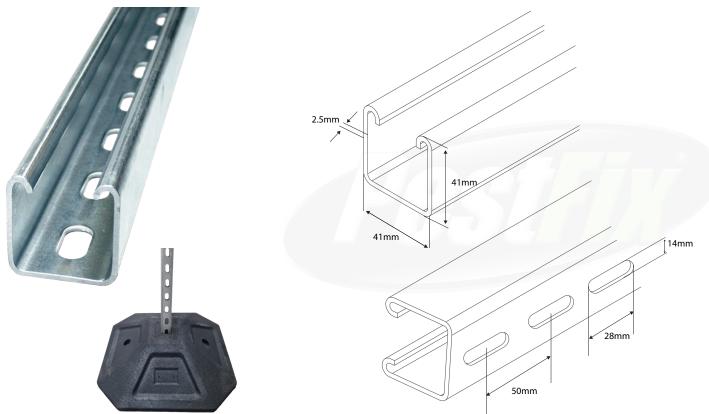

Dimensions (WxH)	41mm x 41mm (2.5mm thickness)
Dimensions (L)	0.5m / 1.0m / 1.5m / 2.0m / 3.0m
Details	Rolled C Channel (not bent)
	14mm x 28mm slots at 50mm intervals
Weight (kg)	1.25 / 2.5 / 3.75 / 5.0 / 6.25
Material	Hot Dipped Galvanised Steel

All specification details have a tolerance of +/- 10%

Used as a light duty support for bird control netting installations at 5-10 metre intervals depending on mesh size / weight / wind loading of netting being installed.

When used in conjunction with Non Piercing Rubber Roof Mounts, installer must ensure the mount is countertensioned using guy wires and is not used as a free-standing mount. Max length recommended for bird netting elevations is 2m.